


Formula 54 is an excellent penetrating lubricant that contains PTFE for added lubricity during extreme temperatures. Formula 54 is recommended on any surface that slips, slides, twists, pivots or moves. Formula 54 is a high tech formulation of specialized oils blended with micron-sized PTFE to provide excellent long lasting lubrication and penetration. This unique formula penetrates and defends against corrosion, dissolves grease and grime, and continues to work in extreme temperatures. (-55°F to 475°F). Provides superior corrosion protection on all metal surfaces (passes 60+ days ASTM D-1748 humidity cabinet test) does not contain chlorinated solvents which are being prohibited by companies due to potential health hazards.

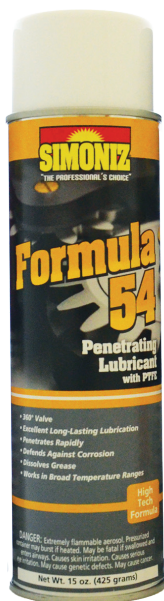

Where To Use

Vehicles	Industrial machines	Motors
Large machinery	Nuts and bolts	Hinges
Roller bearings	Conveyors/Pulleys	Electric motors
Gears	Automotive repair shops	Airport terminals
Motorcycle dealers	Machine shops	Machinery manufacturers
Tool and die shops	Trucking companies	Metal fabricating shops

Directions

Shake well before using. Spray liberally on frozen or corroded part. Let stand for several minutes to allow thorough penetration. Reapply for long-lasting protection.

Technical Specifications

CAN SIZE: ...20 oz.	NET WEIGHT: 15 oz.
ODOR:Solvent	USDA RATING: ..N/A
TYPE:Aerosol	PROPELLANT: ...Hydrocarbon
pH:N/A	SPRAY PATTERN: Stream
COLOR:White	FLAMMABILITY: Yes



201 Boston Turnpike, Bolton, CT 06043-7203 800-227-5536 • 860-646-0172 • FAX 860-645-6070

www.simoniz.com www.simonizjanitorial.com

All labels are GHS compliant.