


*Grip Seal is a true underlayment or stand-alone sealer which has excellent performance in both circumstances. Grip Seal is Urethane fortified and considered a semi-permanent sealer. Because of its durability Grip Seal will withstand several conventional strip cycles.*

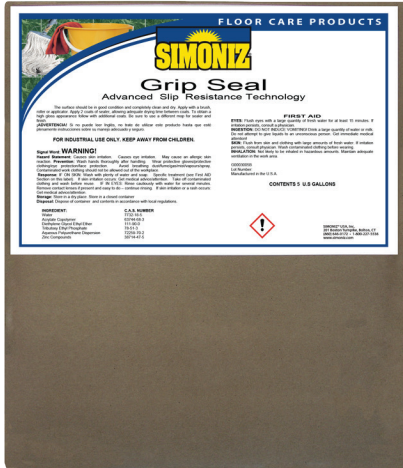

### Where To Use

Concrete - Polished concrete - Stone  
Most other hard surfaces that Floor Finish is typically applied  
Retail Stores  
Warehouses  
Garage Floors

### Dilution

As is

### Directions

1. Strip Floor removing all previous Floor Finish
2. Remove Stripping Solution by rinsing several times with water. Using a wet vac can speed the pickup process
3. After the floor has dried completely, apply 1 to 2 coats of Grip Seal using Finish Mop or Flat Mop Applicator
4. Allow 30-45 minutes drying time
5. Reapply Grip Seal and allow to fully dry
6. For additional gloss enhancement, follow with 1-2 coats of Grip Coat Finish

### Technical Specifications

COLOR: ..... White Opaque	VISCOSITY: ..... Water Thin
FORM: ..... Liquid	STORAGE(Unopened): ..... 1 Year @R.T.
SCENT: ..... Mild solvent/polymer	BIODEGRADABLE: ..... Yes
pH: ..... 8.0-9.0	WEIGHT/GAL: ..... 8.45 lbs/gal
FLASH POINT:.. None	SHIPPING CLASS: .....None
FOAM: ..... Low	PACKAGING:.....5 gallon bag in box
TYPE: ..... Urethane Sealer	

